




## Phonak Sky L-UP (L90/L70/L50/L30/Trial)

### Standard and Mini Earhook HE11


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

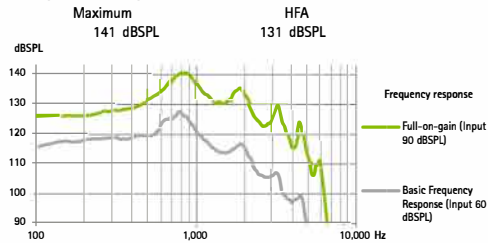


#### Acoustic gain

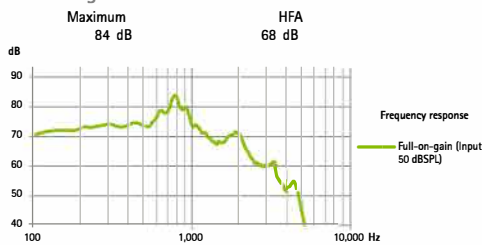

Frequency range	<100 Hz - >4700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	5.0%	1.0%	1.0%	1.0%
Battery current	3.3 mA			
Expected operating time*	188 h			
Equivalent input noise level	19 dB SPL			

#### Induction coil sensitivity

ETLS	HFA SPLIV
0 dB	115 dB

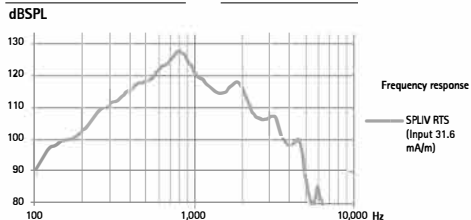


### Standard and Mini Earhook HE11 680


#### 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

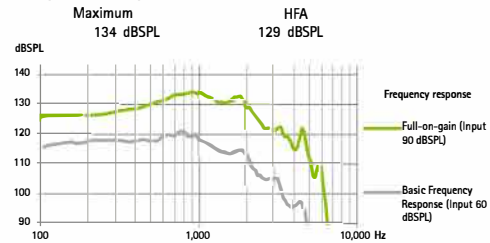


#### Acoustic gain

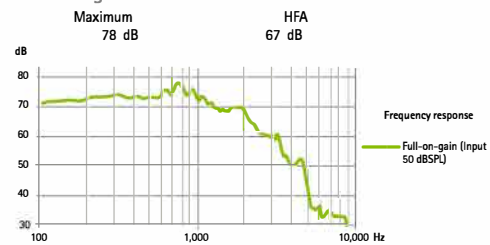

Frequency range	<100 Hz - >4700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	3.0%	1.0%	1.0%	1.0%
Battery current	2.8 mA			
Expected operating time*	221 h			
Equivalent input noise level	19 dB SPL			

#### Induction coil sensitivity

ETLS	HFA SPLIV
1 dB	114 dB

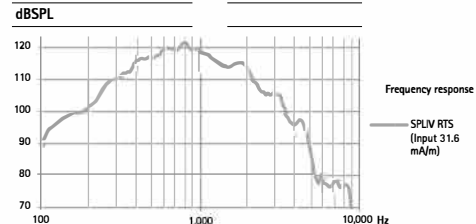

#### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms

#### Warnings

- ⚠ This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.
- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

\* Battery performance depends on active features, the use of wireless accessories, hearing loss, battery age, sound environment and earpiece. Note that for non-rechargeable ZnAir batteries operating time might vary depending on the battery model



Sonova AG · Laubisrütistrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand

