




Phonak Audéo L-R-Fit (L90/L70/Trial)


M Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

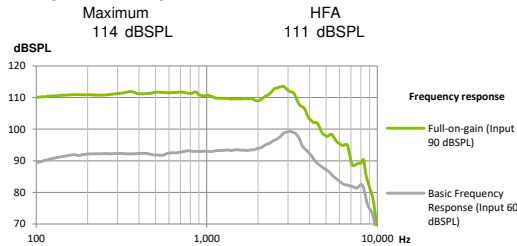

Acoustic gain

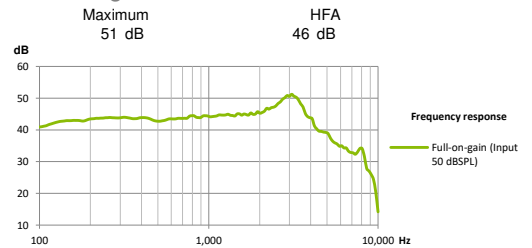


| | | | | |
|------------------------------|--------------------|--------|---------|---------|
| Frequency range | <100 Hz - >8000 Hz | | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz | 3200 Hz |
| | 1.5% | 2.0% | 2.0% | 1.0% |
| Expected operating time* | 18 h | | | |
| Equivalent input noise level | 19 dB SPL | | | |


P Receiver 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

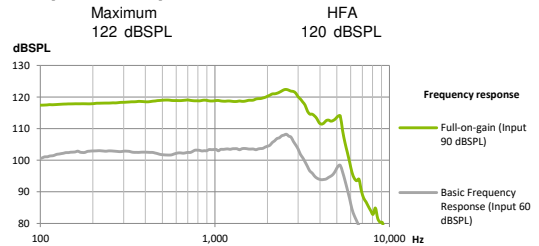

Acoustic gain

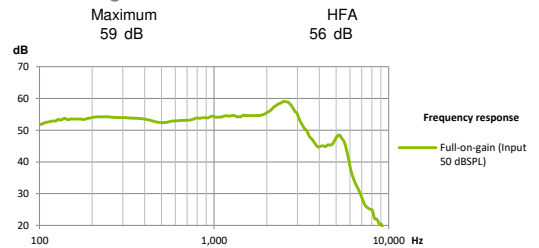

| | | | | |
|------------------------------|-------------------|--------|---------|---------|
| Frequency range | <100 Hz - 6300 Hz | | | |
| Total harmonic distortion | 500 Hz | 800 Hz | 1600 Hz | 3200 Hz |
| | 1.0% | 1.5% | 1.0% | 1.0% |
| Expected operating time* | 18 h | | | |
| Equivalent input noise level | 19 dB SPL | | | |

General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

Warnings

- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland
www.phonak.com

A Sonova brand

